



TPS-P6U(60)-250W 250W Poly Crystalline Solar Module

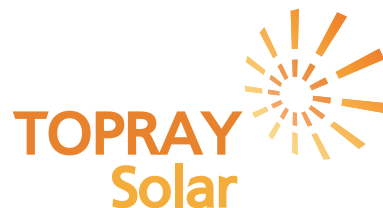

Not Your Average Solar Provider

Our Products Categories

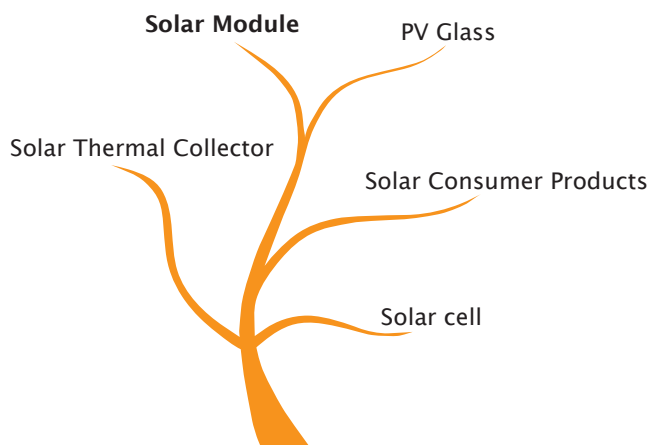

Professional Solar Provider Since 1992


Key Feature

- Plus power tolerance: 0~3%
- Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust
- Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity

Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"
- 100%EL double-inspection ensures modules are defects free

Electrical Characteristics

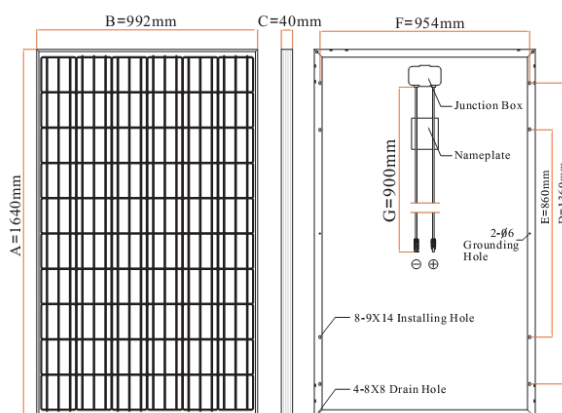

MECHANICAL SPECIFICATION

Cell Type	Poly crystalline 156×156mm
Number of cells	60pcs
Dimensions(A×B×C)	1640×992×40mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	Length 900mm

PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module Series	TPS-P6U(60)-250W
Maximum Power at STC(Pmax)	250W
Open Circuit Voltage(Voc)	37.1V
Short Circuit Current(Isc)	8.75A
Maximum Power Voltage(Vmp)	30.1V
Maximum Power Current(Imp)	8.31A

ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

DEALER INFORMATION BOX

NOTE:READ SAFETY AND INSTALLATION INSTRUCTIONS OR CONTACT THE TECHNICAL SERVICE FOR FURTHER INFORMATION BEFORE USING THE PRODUCT.
© Mar 2013 Shenzhen Topray Solar Co.Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.